



**LUMINGLITE**

Lumilite Lighting Tech. Co., Ltd.

---

# Specification

**Model:** LMNV-75-24

**Description:** Input:200-240Vac, Output: 24Vdc, 3.12A, LED Driver

**Date** : \_\_\_\_\_

**Prepared by:** \_\_\_\_\_

**Checked by:** \_\_\_\_\_

**Approved by:** \_\_\_\_\_

**Customer authorized signature:** \_\_\_\_\_

---


**Issued Status:**  Draft  Published

ADD : No.23 Six Hi-tech Road,Hi-tech Innovation Coast,Tangjiawan Town Zhuhai City, Guang Dong, China.

HTTP//: [www.luminglite.com](http://www.luminglite.com)

Email:Info@luminglite.com    Sales@luminglite.com

# Specification

<b>Product Name:</b>	LED Driver	<b>Applications:</b>
<b>Model:</b>	LMNV-75-24	Applicable occasions: Indoor
		<b>Features:</b>
		<ol style="list-style-type: none"> <li>Wide voltage input.</li> <li>Working temperature range <math>-20^{\circ}\text{C} \sim +45^{\circ}\text{C}</math>.</li> <li>With OCP、SCP protection function.</li> <li>Through the FCC、CB、CE、TUV Mark、3C、RCM、IP20、RoHS</li> </ol>
		<b>Installation:</b>
		screws for fixing.
		<b>Warranty:</b>
		3 years.

## 1、Product Parameters:


Output Characteristics	Rated Output Voltage	24V
	Rated Output Current	3.12A
	Rated Output Power	75W
	Output Voltage Accuracy	$\pm 5\%$ (23.5-24.5V)
	Output Ripple & Noise	$\leq 600\text{mV}$
Input Characteristics	Input Voltage Range	200VAC-240VAC
	Input Frequency Range	50~60HZ
	Input Current	$\leq 0.6\text{A}$ (200-240VAC)
	Surge Current (cold start)	46A @230VAC
	Power Efficiency	87%
	PF	$> 0.95$
Protective Characteristics	Over-Current Protection	■YES □NO
	Short-Circuit Protection	■YES □NO
	Over-Voltage Protection	■YES □NO
	Over-Temperature Protection	□YES ■NO
Environmental Characteristics	Working Temperature	$-20^{\circ}\text{C} \sim +45^{\circ}\text{C}$
	Working Humidity	45%~85%
	Storage Temperature	$\sim 35^{\circ}\text{C} \sim +65^{\circ}\text{C}$

	IP Rating	IP20	
	Vibration	10~500Hz, 1.0mm, 15 minutes (for X、Y、Z each axis)	
Safety and EMC	Safety Standard	Design refer to UL/cUL、 FCC、 CB、 CE、 TUV Mark、 3C、 RCM、 RoHS	
	Dielectric Strength (Hi-Pot)	I/P-O/P	3.75KVAC/ 10mA/ 3S
		I/P-Case	1.5KVAC/ 10mA/ 3S
	Insulation Resistance	100MΩ / 500VDC/ 3S	
	Grounding Resistance	≤0.5Ω	
EMC	Design refer to FCC part 15classB EN55015		
Other Characteristics	MTBF	30Khrs. MIL-HDBK-217F(25℃)	
	Size	320*30*18mm(L*W*H)	
	Weight	0.17 kg	


Remarks:

- ① Test environment temperature :  $25 \pm 2$  °C ;
- ② Ripple and noise measurement methods: terminal to parallel 47uF electrolytic capacity and 0.1uF ceramic capacity, in 20 MHZ Bandwidth measurement.

2、 Profile Drawing:

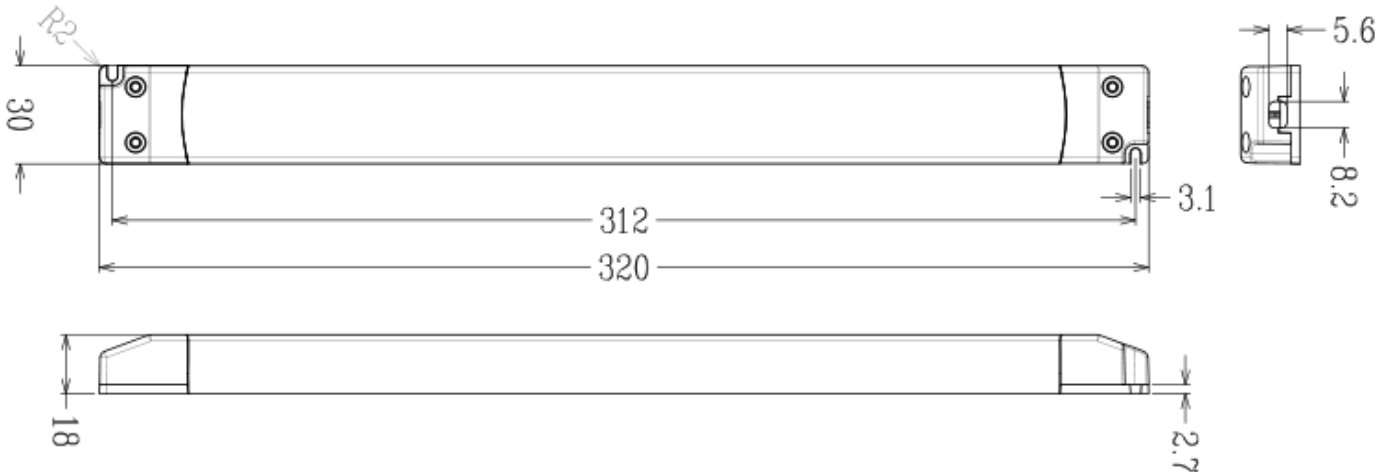

## Wiring Diagram

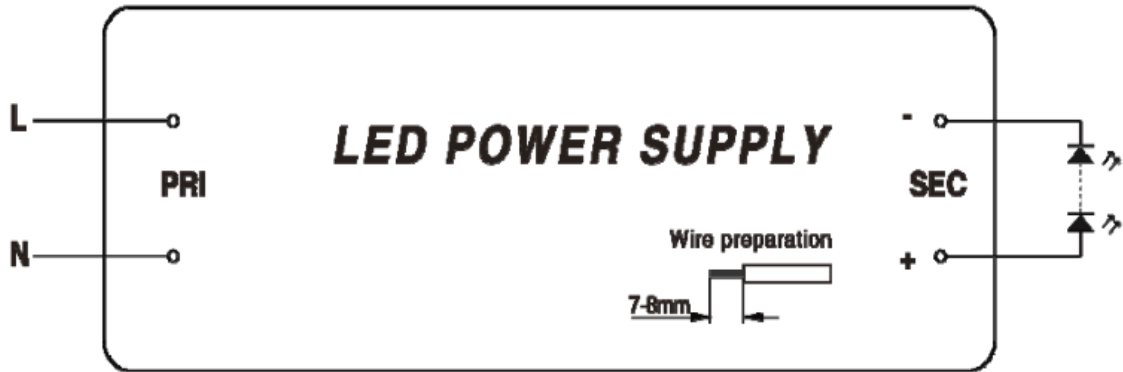

# LUMINGLITE

### 3、Laybel Drawing:

 <b>LUMINGLITE</b>	<b>LMNV-75-24</b> <b>LED POWER SUPPLY</b>	Sec.: 24VDC, Max. 3.12A    P <sub>tc</sub> 75W tc: 80°C    ta: 45°C	
-----------------------	--	--	--

#### 4、Packaging Diagram:

产品/Product:



内盒/Inner box:



外箱/Outer carton:



#### 5、Packaging Information:

- 1、Outer Carton: 350\*320\*205mm; Inner packing box: 336\*29\*37mm
- 2、(QTY)/ Quantity: 50pcs; Total 5 layer, each layer 10 pcs.
- 3、(NW) / Net Weight: 8.5(1±10%) kg;
- 4、(GW) / Gross Weight: 10.1(1±10%) kg;
- 5、The actual packed quantity and weight may subject to change without prior notice.

#### 6、Note:

- 1、 Please ensure that the ground wire is properly grounded and ensure it does not come into contact with the neutral wire.
- 2、 Please make the power supply installed in a well-ventilated place, to ensure that the environment temperature is appropriate.
- 3、 Do not overload the power supply with multiple appliances.
- 4、 Please do not touch the metal shell surface to avoid high temperature scald.
- 5、 Do not install in the minefield or high pressure area.
- 6、 Do not attempt to repair privately. Please contact the supplier if you have any questions.

### 7、 Tips:

- 1、 To be installed by a certified electrician. Please read and follow the instructions carefully before installing. Ensure all contact points are connected firmly.
- 2、 Please pay attention to the using environment, and conduct regular check and maintenance to eliminate safety risks.



---

# LUMINGLITE

---