



LUMINGLITE

Lumilite Lighting Tech. Co., Ltd.

Specification

Model: LMWV-60-12

Description: Input:200-240Vac, Output: 12Vdc, 5A, LED Driver

Date : _____

Prepared by: _____

Checked by: _____

Approved by: _____

Customer authorized signature: _____


Issued Status: Draft Published

ADD : No.23 Six Hi-tech Road,Hi-tech Innovation Coast,Tangjiawan Town Zhuhai City, Guang Dong, China.

HTTP//: www.luminglite.com

Email:Info@luminglite.com Sales@luminglite.com

Specification

Product Name:	LED Driver	Applications: Applicable occasions: Indoor、Outdoor
Model:	LMWV-60-12	
		Features: <ol style="list-style-type: none"> 1、 Wide voltage input. 2、 Working temperature range -25℃~+50℃. 3、 With OCP、 SCP protection function. 4、 Through the FCC、 CB、 CE、 TUV Mark、 RCM、 IP67、 RoHS
		Installation: screws for fixing.
		Warranty: 5 years.

1、 Product Parameters:


Output Characteristics	Rated Output Voltage	12V
	Rated Output Current	5A
	Rated Output Power	60W
	Output Voltage Accuracy	(11.5-12.5V)
	Output Ripple & Noise	≤600mV
Input Characteristics	Input Voltage Range	200VAC-240VAC
	Input Frequency Range	50~60HZ
	Input Current	≤0.38A(200-240VAC)
	Surge Current (cold start)	46A @230VAC
	Power Efficiency	86%
	PF	>0.95
Protective Characteristics	Over-Current Protection	■YES □NO
	Short-Circuit Protection	■YES □NO
	Over-Voltage Protection	■YES □NO
	Over-Temperature Protection	□YES ■NO

Environmental Characteristics	Working Temperature		-25℃~+50℃
	Working Humidity		10%~95%RH
	Storage Temperature		~35℃~+65℃
	Storage Humidity		10%~95%RH
	IP Rating		IP67
	Vibration		10~500Hz, 1.0mm, 15 minutes (for X、Y、Z each axis)
Safety and EMC	Safety Standard		Design refer to UL/cUL、 FCC、 CB、 CE、 TUV Mark、 3C、 RCM、 IP67、 RoHS
	Dielectric Strength (Hi-Pot)	I/P-O/P	3.75KVAC/ 10mA/ 3S
		I/P-Case	1.5KVAC/ 10mA/ 3S
	Insulation Resistance		100MΩ / 500VDC/ 3S
	Grounding Resistance		≤0.5Ω
EMC		Design refer to FCC part 15classB EN55015	
Other Characteristics	MTBF		50Khrs. MIL-HDBK-217F(25℃)
	Size		295*35*20mm(L*W*H)
	Weight		0.42 kg

Remarks:

- ① Test environment temperature : 25 ± 2 ℃ ;
- ② Ripple and noise measurement methods: terminal to parallel 47uF electrolytic capacity and 0.1uF ceramic capacity, in 20 MHZ Bandwidth measurement.

2、Profile Drawing:

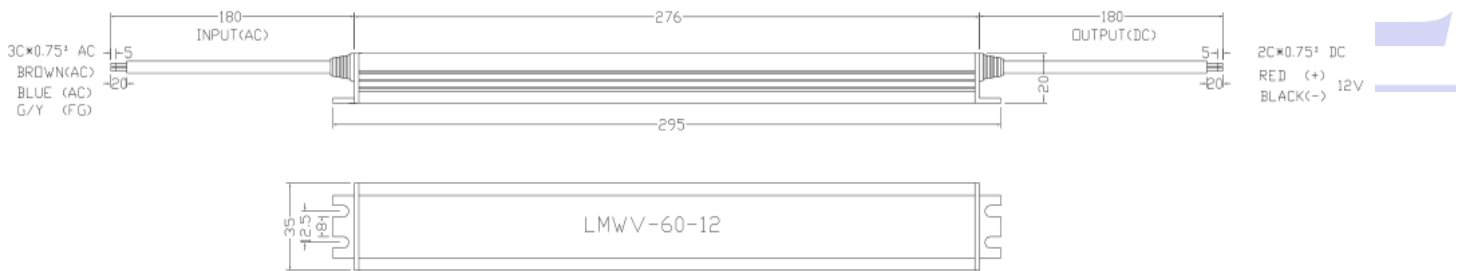

Cable(Black)

Cable(white)

3、Laybel Drawing:

L Brown G Y/G N Blue	<p>LED DRIVER</p> <p>MODEL No: LMWV-60-12</p> <p>Pf:0.95</p> <p>Constant Voltage Type</p>	<p>Po:60W SELV</p> <p>For LED Only</p> <p>Suitable For Wet Locations</p>	<table border="1"> <tr> <td>Input Voltage</td> <td>200-240V~ 50/60Hz</td> <td>Output Voltage</td> <td>12V---</td> </tr> <tr> <td>Input Current</td> <td>0.38-A Max</td> <td>Output Current</td> <td>5A</td> </tr> </table>	Input Voltage	200-240V~ 50/60Hz	Output Voltage	12V---	Input Current	0.38-A Max	Output Current	5A	<p>CE</p> <p>Five-year warranty</p> <p>IP67</p> <p>SELV</p> <p>RoHS</p> <p>S/N: _____</p>	<p>ta: 50℃ tc: 85℃</p> <p>OUTPUT Red (Brown) "+" Black (Blue) "-"</p> <p>MADE IN CHINA</p>
Input Voltage	200-240V~ 50/60Hz	Output Voltage	12V---										
Input Current	0.38-A Max	Output Current	5A										

4、Packaging Diagram:

产品/Product:



内盒/Inner box:



外箱/Outer carton:



5、Packaging Information:

- 1、Outer Carton: 350*320*205mm; Inner packing box: 336*29*37mm
- 2、(QTY)/ Quantity: 50pcs; Total 5 layer, each layer 10 pcs.
- 3、(NW) / Net Weight: 21.0(1±10%) kg;
- 4、(GW) / Gross Weight: 21.54(1±10%) kg;
- 5、The actual packed quantity and weight may subject to change without prior notice.

6、Note:

Please ensure that the ground wire is properly grounded and ensure it does not come into contact with the neutral wire.

- 2、 Please make the power supply installed in a well-ventilated place, to ensure that the environment temperature is appropriate.
- 3、 Do not overload the power supply with multiple appliances.
- 4、 Please do not touch the metal shell surface to avoid high temperature scald.
- 5、 Do not install in the minefield or high pressure area.
- 6、 Do not attempt to repair privately. Please contact the supplier if you have any questions.

7、 Tips:

- 1、 To be installed by a certified electrician. Please read and follow the instructions carefully before installing. Ensure all contact points are connected firmly.
- 2、 Please pay attention to the using environment, and conduct regular check and maintenance to eliminate safety risks.



LUMINGLITE
